



RS232 Isolator

MCV2-A232



RS232

RS232

Galvanic Isolation

RS232 Isolator for communications in environments electrically noisy.

The isolator MCV2-A232 separates galvanically a RS232 port. It is optimal for communication in electrically noisy industrial environments.



CHARACTERISTICS




MCV2-A232

- Galvanic Isolation, up to 2500 Vrms (1 minute)
- With RTS and CTS lines
- DC Power input: +10 a 30 VDC.
- Leds indication for power and flow of information
- Removable terminal blocks connectors
- Baud rate up to 115200 bps
- Operating Temperature: -5 a 65 °C, storage temperature: -40 a 75°C
- Industrial fireproof case with assembly for DIN rail



EXAMPLE OF USE

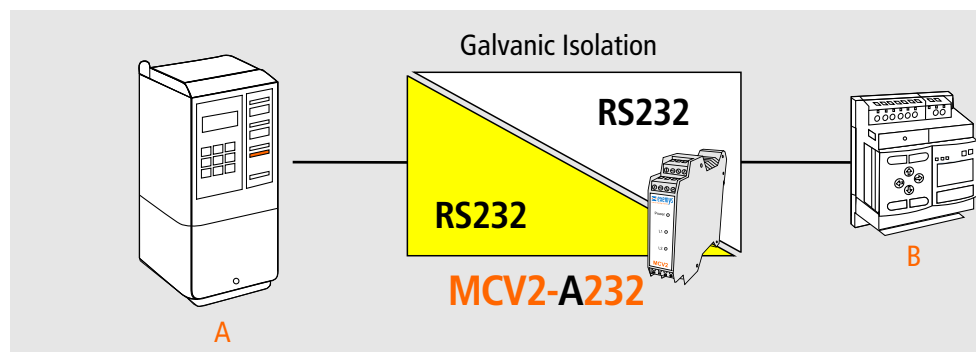

ISO 9001:2008 QUALITY SYSTEM



GESTION DE LA CALIDAD

RI-9000-6174

Acreditado por OAA



PART NUMBER

MCV2-A232-IA-IS

www.exemys.com